



- Four independent channels.
- Dual contacts (NO / NC) per channel.
- 24 VDC coil voltage.
- Optical act indication.
- Easy rail mounted housing.
- Special versions on request.

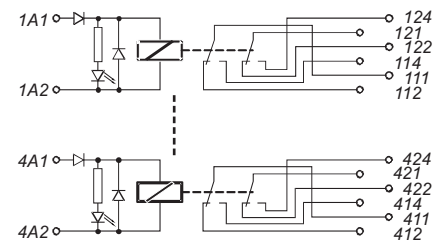

The LMP-51K-4 relay module is designed as output device for a control unit. A module consist of four independent channels. Each channel has two independent NO / NC contacts. Every relay is easy detachable thanks to the holder. Appropriate LED diode indicates relay acting. There is possibility to deliver device for non-standard coil voltages.

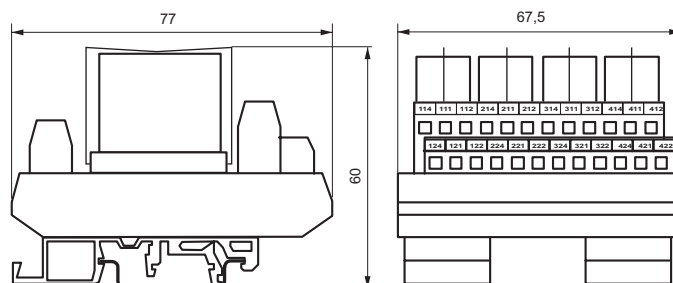

Order LMP-51K-4 using the following code:

LMP - □ 1K - 4
 □ 5 - 24V DC coil relay
 □ S - relay coil voltage on request

Input

- binary signal 0 or 24V DC
- current consumption $\leq 40\text{mA}$ per channel

Output

- output type contacts NO / NC
- contact load $\leq 8\text{A}$, 230V AC
 $\leq 8\text{A}$, 24V DC; 0.4 A, 250V DC

General data

- act signalization red LED diode
- galvanic separation (test) 3kV AC, 50Hz, 1 min

Temperature

- operating temperature 0...70°C

Environment conditions

- storage temperature -20...85°C
- humidity (non-condensing) $\leq 90\%$
- working position any

Housing

- material molded ABS
- protection housing IP00
- wire connections screw terminals 1.5 mm²
- dimensions see drawings on the first page
- weight ~ 200 g